


Fasspumpen / Barrel pumps

Languages >  

Übersicht FLUX Fasspumpe mit Zubehör

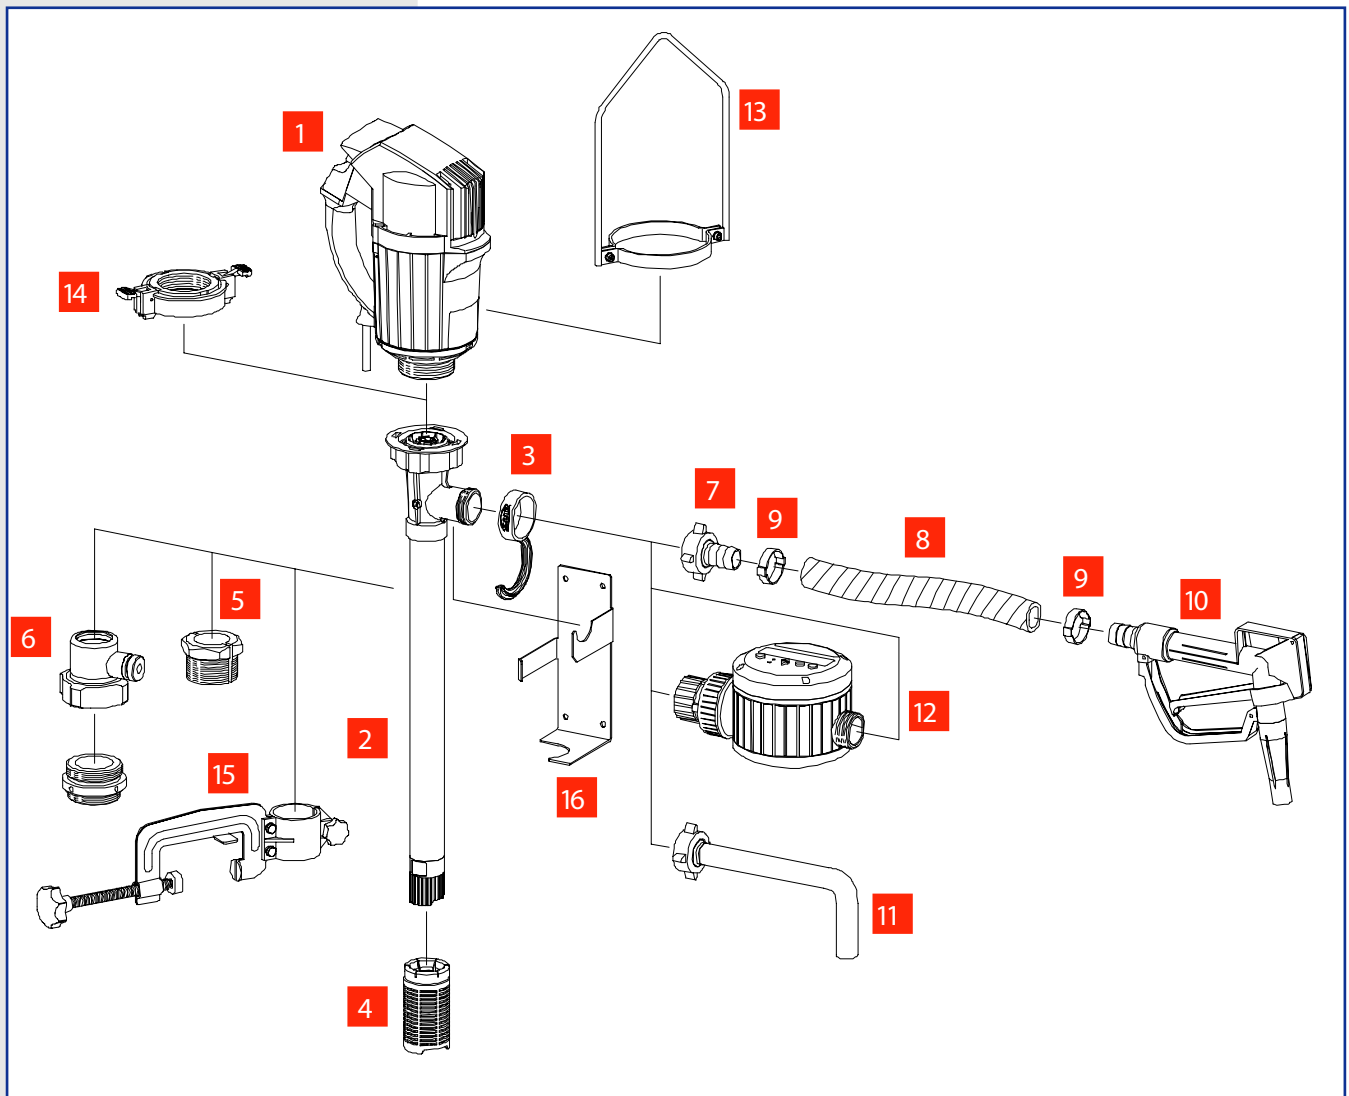

- | | | | |
|----|-----------------------------------|----|-------------------------------|
| 1 | Antriebsmotor | 1 | Drive motor |
| 2 | Fasspumpe | 2 | Barrel pump |
| 3 | FLUX-Clip | 3 | FLUX-Clip |
| 4 | Fußsieb | 4 | Suction strainer |
| 5 | Fassverschraubung | 5 | Compression gland |
| 6 | FES-Emissions-Schutzventil | 6 | Fume gland type FES |
| 7 | Schlauchanschluss | 7 | Hose connection |
| 8 | Schlauch | 8 | Flexible hose |
| 9 | Schlauchklemme | 9 | Hose clip |
| 10 | Zapfpistole | 10 | Quick action tap |
| 11 | Auslaufbogen | 11 | Discharge spout |
| 12 | Flüssigkeits-Mengenmesser FMC 100 | 12 | Liquid meter type FMC 100 |
| 13 | Haltebügel | 13 | Carrying handle |
| 14 | Schnellspannkupplung SSK 400 | 14 | Quick action coupling SSK 400 |
| 15 | Anklemmvorrichtung | 15 | Attachment clamp |
| 16 | Pumpenhalterung | 16 | Wall bracket |

Barrel Pumps

Languages > 

FLUX Pump Kit - "Juniorflux" - Polypropylene



Juniorflux F 314
Item-No.: 253290504016

Product Description

Lab and barrel pumps are especially used for filling and transferring small amounts of acid and alkaline solutions. They are equipped with a powerful motor with a 2-speed switch that allows sensitive filling operations.

Another feature is the ergonomically designed handle and its lightweight construction for single hand operation so that it can be used in almost every field of industry.


Technical Data

Pump Material	PP (Polypropylene)
Sealing Material	Sealless
Delivery Rate	Max. 40 l/min
Delivery Head	Max. 5,2 m
Viscosity of Fluid	Max. 250 mPas
Outer-Ø	25 mm
Thread On Outlet	G 1 A (BSP 1" Male)
Immersion Depth	700 mm
Motor	Commutator Motor 230 W, 230 V 50 Hz
Voltage	230 V / 50 Hz
Protection Class	IP 24
Overload Protection	
Temperature	Max. 45°C

Scope of Supply:

JUNIORFLEX F 314 PP-25/19
Hose Connection PP, DN 13
1,5 m flexible PVC hose DN 13
2 Hose dips and 1 hand tap PP, DN 13, seal FKM

Performance Chart

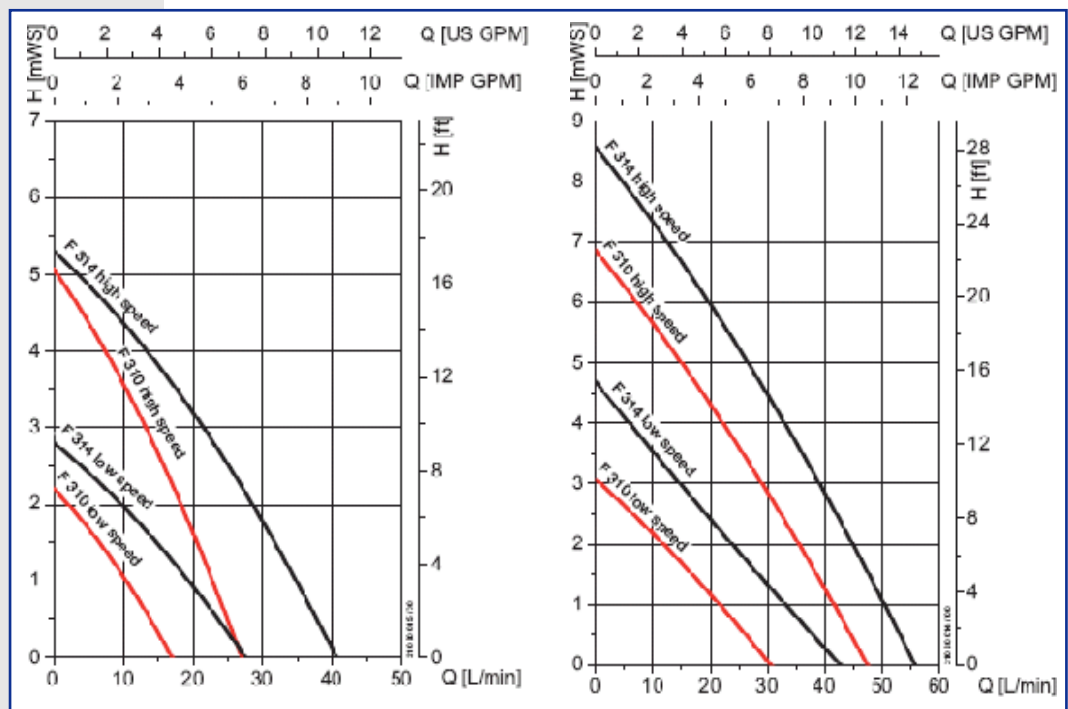


* Changes and mistakes excepted, prices plus packing and VAT.

Barrel Pumps

Languages > 

FLUX Pump Kit - "Juniorflux" - Polypropylene

Product Description

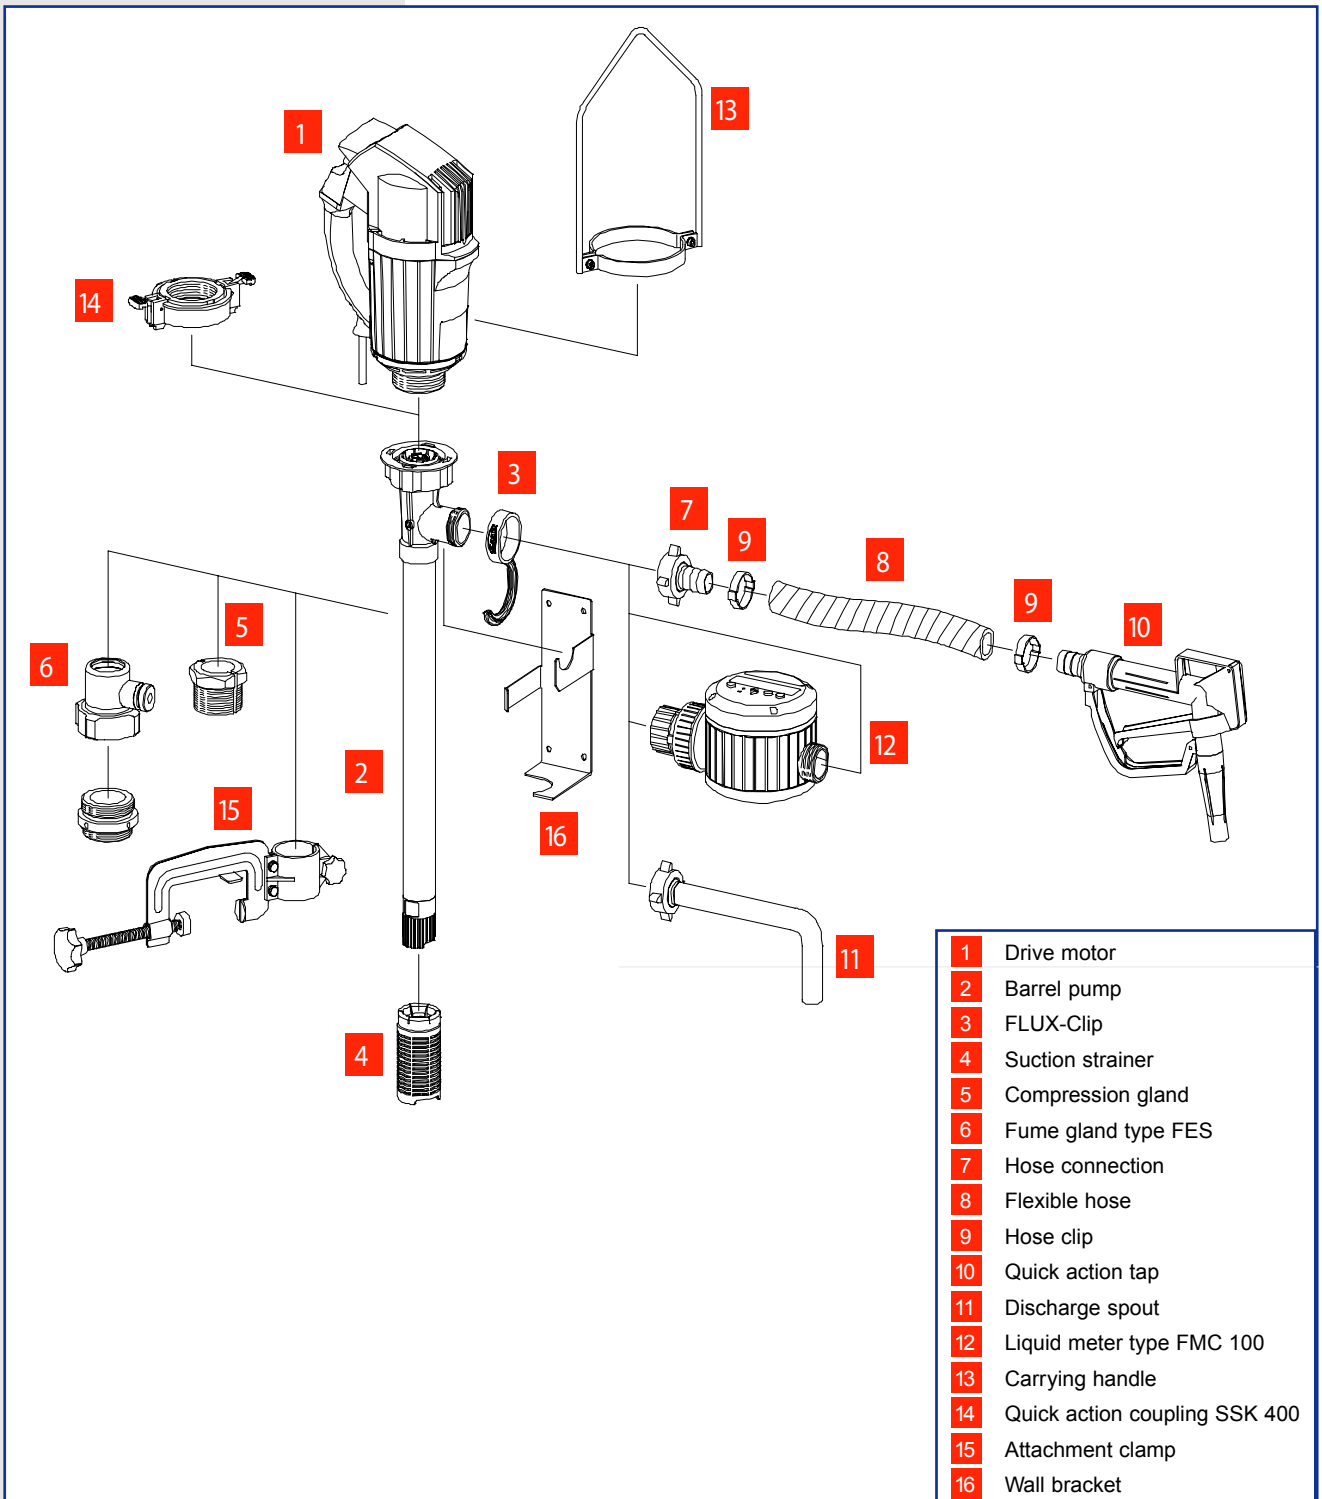

- | | |
|----|-------------------------------|
| 1 | Drive motor |
| 2 | Barrel pump |
| 3 | FLUX-Clip |
| 4 | Suction strainer |
| 5 | Compression gland |
| 6 | Fume gland type FES |
| 7 | Hose connection |
| 8 | Flexible hose |
| 9 | Hose clip |
| 10 | Quick action tap |
| 11 | Discharge spout |
| 12 | Liquid meter type FMC 100 |
| 13 | Carrying handle |
| 14 | Quick action coupling SSK 400 |
| 15 | Attachment clamp |
| 16 | Wall bracket |

* Changes and mistakes excepted, prices plus packing and VAT.